




LOAD KING TRAILERS

Model 252 LR BT

P.O. Box 427
701 E. Rose ST.
Elk Point, S.D. 57025
USA

Phone (605) 356-3301
Fax (605) 356-3268
Toll free (888) 264-5522
www.loadkingtrailers.com

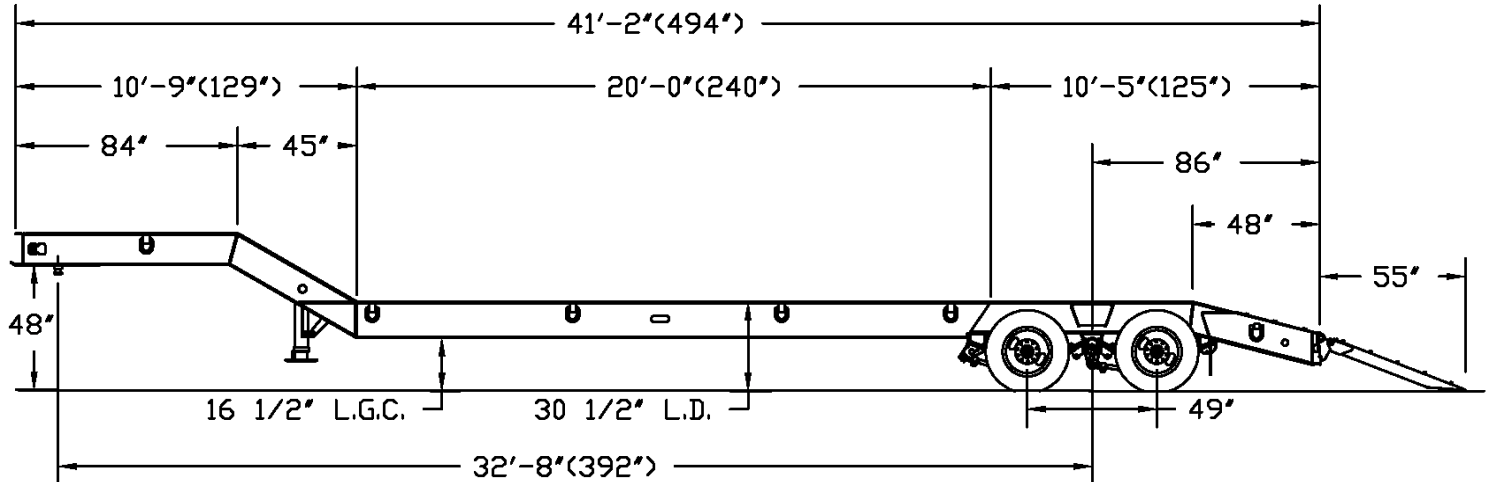

General Specifications

Dimensions

50,000 lb capacity distributed, 40,000# in 8 foot load concentration at 60 miles per hour
50,000 psi yield strength steel
12,000lb estimated unit weight
86 inch swing clearance
20 foot deck length
102 inch deck width
Deck height 30 1/2 inch loaded
16 1/2 inch loaded ground clearance

Gooseneck

7 foot long (flat top) rigid style perimeter design
30 degree slope with steel deck plate covering
Tool well front of gooseneck in 5th wheel area
48 inch pin height
Post type landing legs

Deck

Perimeter design
High tensile I-beam crossmembers

Deck Cont.

8 D-rings on deck, 2 on beaver tail, 2 on gooseneck
2 inch Apitong full width

Subframe

4 spring suspension
49 inch axle spacing spring brakes and ABS system
Eight (8) 235/75 R 17.5 tires
Hub piloted budd type disc wheels
12 1/4" x 7 1/2" ABS braking system

Other

DOT rubber mounted sealed beam lights with modular harness
Mud flaps
Shot blast – primed and painted Black polyurethane
Red and white conspicuity striping
48 inch beavertail
54 inch spring assist ramps adjustable 6 inch side to side