




LOAD KING TRAILERS

Model 352 DFP

P.O. Box 427
701 E. Rose ST.
Elk Point, S.D. 57025
USA

Phone (605) 356-3301
Fax (605) 356-3268
Toll free (888) 264-5522
www.loadkingtrailers.com

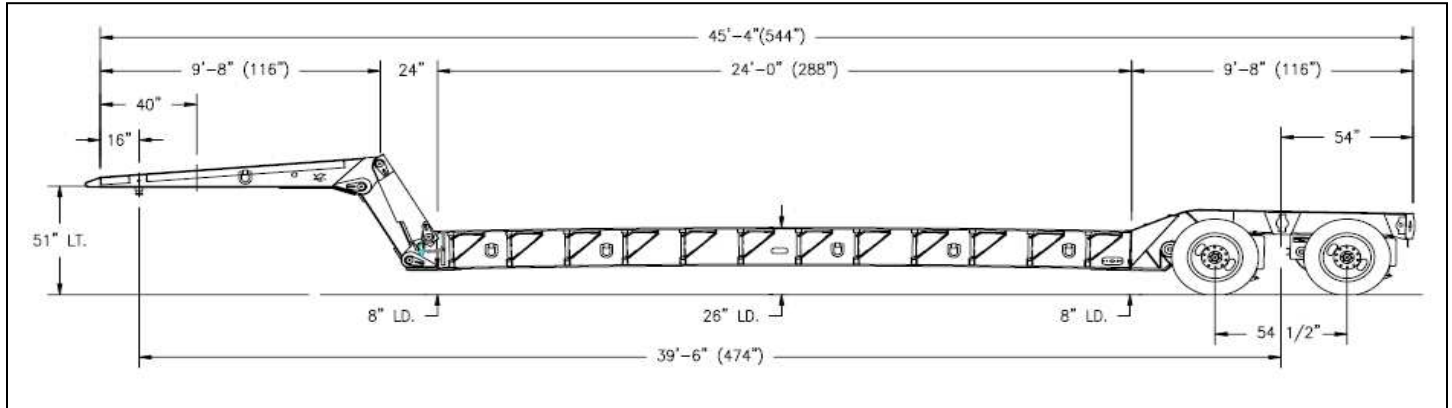

General Specifications

Dimensions

70,000 lb capacity in 10 foot load concentration at
60 miles per hour
100,000/80,000 psi yield strength steel construction
18,500 lb estimated base unit weight
106 inch and 85 inch swing clearance
24 foot deck length, 102 inch deck width
8 inch loaded ground clearance

Gooseneck

Parallel link style power fold gooseneck
Low profile scraper style
Tool well over kingpin area for storage
Linkage lock pins on both sides of trailer
7 degree gooseneck load angle
Gooseneck controls located at drivers side of gooseneck
13 HP self contained power pack with cover

Deck

Perimeter designed with full depth 18 inch beams
Center loading designed crossmembers in gooseneck
14 D-ring rated at 10,000 lbs each

Deck Cont.

2 inch Apitong full width
Flag pockets front of deck and rear of trailer
24 degree radiused rear drop

Subframe

Air ride suspension
Two 25,000 lb axles
54 1/2 inch axle spacing spring brakes with ABS system
Eight (8) 255/70 R 22.5 tires
Hub piloted budd type disc wheels
16 1/2 x 7 ABS braking system
Oil seals

Other

DOT rubber mounted sealed beam lights with modular
Harness
Mud flaps
Shot blast – primed and painted Black polyurethane
Double reinforced tailgate

Operating Pressure/GPM

Wet kit System requires 3000 PSI at 10 GPM
Maximum flow to lift load at full capacity
ALL WEIGHTS ARE +/- 3%