




LOAD KING TRAILERS

Model 352 LR BT

P.O. Box 427
701 E. Rose ST.
Elk Point, S.D. 57025
USA

Phone (605) 356-3301
Fax (605) 356-3268
Toll free (888) 264-5522
www.loadingtrailers.com

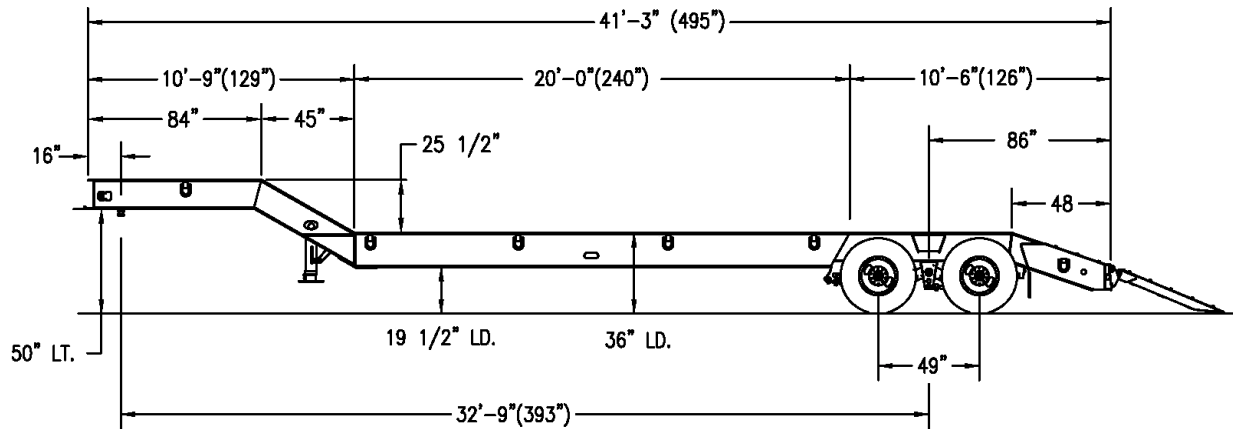

General Specifications

Dimensions

35 Tons in 8' concentrated load base @ 60 mph
14,200# estimated base weight
10'-9" gooseneck length – 86" swing clearance
20' deck length
102" wide
36" loaded deck height
51" 5th wheel height

Gooseneck

Full width platform
30 degree full width slope to upper deck w/ steel
Covering
Post type landing gear
Tool well over kingpin

Deck

Perimeter frame deck design
Crossmembers on 24" centers
2" Apitong in track area secured with bolts, clips,
& screws
6 pair D-rings (bent style)

Subframe

Two 25,000lb axles
4 spring's suspension
49" axle spacing
Eight (8) 255/70R22.5 16 pr radials
Hub piloted steel disc wheels
Outboard mounted drums
16 1/2" X 7" brakes
Spring brakes with ABS
Wheel boxes between axles
Open wheel wells
48" beavertail
54" spring assisted ramps adjustable 6" side to
Side.

Other

DOT rubber mounted sealed beam lights with
Modular harness
Load King mud flaps
Shot blast – primed and painted Black polyurethane

Operating Pressure/GPM

Wet kit System requires 3000 PSI at 10 GPM
Maximum flow to lift load at full capacity
ALL WEIGHTS ARE +/- 3%

REV100118

"Specifications subject to change without notice, drawing may show optional equipment."