




LOAD KING TRAILERS

Model 352 SS

P.O. Box 427
701 E. Rose ST.
Elk Point, S.D. 57025
USA

Phone (605) 356-3301
Fax (605) 356-3268
Toll free (888) 264-5522
www.loadkingtrailers.com

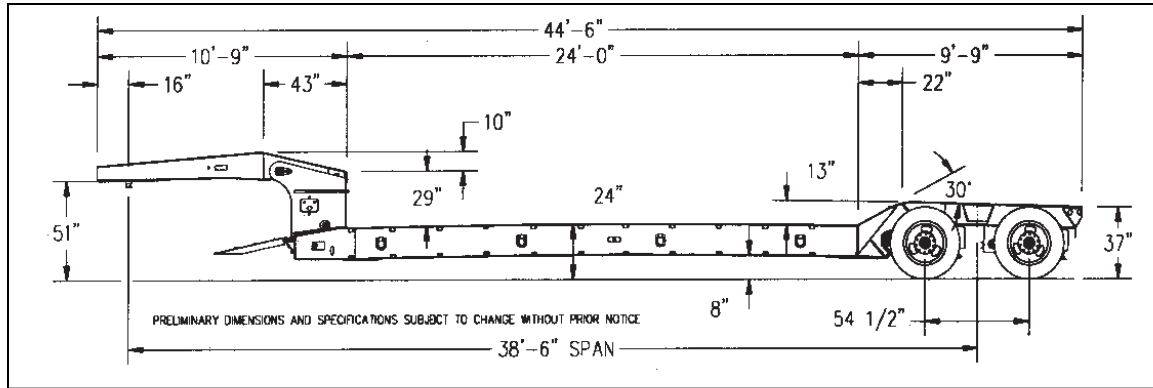

General Specifications

Dimensions

- 35 ton capacity in 12 foot load concentration @ 60 miles per hour
- 100,000/80,000 psi yield strength steel construction
- 14,400 lb estimated base unit weight
- 10 foot 9 inch gooseneck length
- 84 inch swing clearance
- 24 foot deck length, 102 inch deck width
- 24 inch loaded deck height
- 8 inch loaded ground clearance
- 30" Front Flip Ramps
- 51 inch 5th wheel height

Gooseneck

- Non-ground bearing gooseneck design
- Wet kit operation, less tractor portion
- Hydraulic self-lifting detachable gooseneck able to lift above or below transport position
- Hydraulic frame lift support
- Air-activated, self-locking pin on gooseneck, positive lock
- Gooseneck controls located at rear of gooseneck, gooseneck for easy access
- Ratchet system enables multiple deck height settings

Deck

- 4 full depth 16" cambered deck beams
- Heavy duty I-beam crossmembers on 24" centers
- 4 D-ring per side of deck

Deck Cont.

- 12 full depth swing out outriggers per side for 2 inch boards Apitong
- 2 inch Apitong outer (center portion open)
- 30 degree radius rear drop
- 3/4 height rear bolster

Subframe

- Air ride suspension
- Two 25,000 lb axles
- 54 1/2 inch axle spacing, Spring Brakes and 2S 1M ABS System
- Eight 255/70R22.5 tires
- Eight 8.25 x 22.5 hub piloted budd type disc wheels
- Oil seals
- 16 1/2 inch 7 inch brakes
- Auto slack adjusters
- Standard 3 tail light package
- Wide Load sign pockets (no sign)
- Excavator cutout bottom, plated to 1st axle,

Other

- Mid-turn signal and clearance light
- DOT rubber mounted sealed LED lights with modular harness
- Mud flaps
- Red and white conspicuity striping
- Shot blast – primed and painted Black polyurethane

Operating Pressure/GPM

Wet kit System requires 3000 PSI at 10 GPM
Maximum flow to lift load at full capacity
ALL WEIGHTS ARE +/- 3%