




# LOAD KING TRAILERS

## Model 403 DFP

P.O. Box 427  
701 E. Rose ST.  
Elk Point, S.D. 57025  
USA

Phone (605) 356-3301  
Fax (605) 356-3268  
Toll free (888) 264-5522  
[www.loadkingtrailers.com](http://www.loadkingtrailers.com)

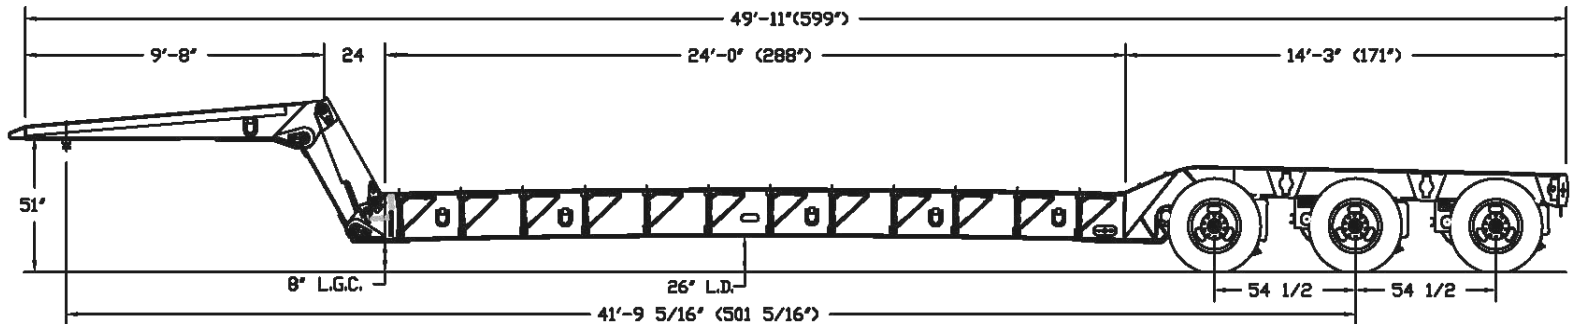

## General Specifications

### Dimensions

80,000 lb capacity in 8 foot load concentration at  
60 miles per hour  
100,000/80,000 psi yield strength steel construction  
21,300 lb estimated base unit weight  
106 inch and 85 inch swing clearance  
24 foot deck length, 102 inch deck width  
8 inch loaded ground clearance

### Gooseneck

Parallel link style power fold gooseneck  
Low profile scraper style  
Tool well over kingpin area for storage  
Linkage lock pins on both sides of trailer  
7 degree gooseneck load angle  
Gooseneck controls located at drivers side of gooseneck  
13 HP self contained power pack with cover

### Deck

Perimeter designed with full depth 18 inch beams  
Center loading designed crossmembers in gooseneck  
14 D-ring rated at 10,000 lbs each

### Deck Cont.

2 inch Apitong full width  
Flag pockets front of deck and rear of trailer  
24 degree radiused rear drop

### Subframe

Air ride suspension  
Three 25,000 lb axles  
54 1/2 inch axle spacing spring brakes with ABS system  
Twelve (12) 255/70 R 22.5 tires  
Hub piloted budd type disc wheels  
16 1/2 x 7 ABS braking system  
Oil seals

### Other

DOT rubber mounted sealed beam lights with modular  
Harness  
Mud flaps  
Shot blast – primed and painted Black polyurethane  
Double reinforced tailgate

### Operating Pressure/GPM

Wet kit System requires 3000 PSI at 10 GPM  
Maximum flow to lift load at full capacity  
ALL WEIGHTS ARE +/- 3%